
STAIR IDENTIFICATION SIGN

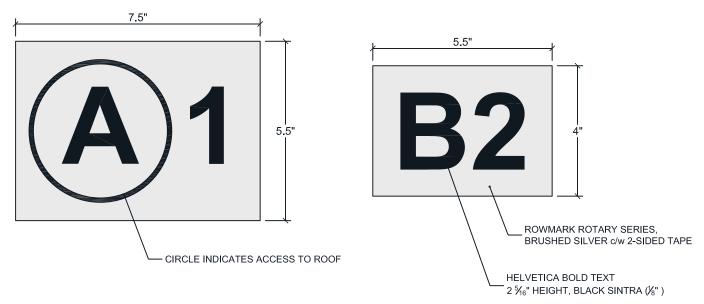

ONTARIO BUILDING CODE

3.4.6.19. FLOOR NUMBERING

- 1. Arabic numberals indicating the assigned floor number shall
 - a. be mounted permanently on each side of doors to exit stair shafts;
 - b. be not less than 60mm high, raised approximately 0.7mm above the surface;
 - c. be located 1500mm from the finished floor; and
 - d. be contrasting in colour with the surface to which they are applied.
- 2. Upper case letters indicating the designation assigned to each exit stair shaft shall be mounted permanently on each side of doors to the exit stair shaft and shall
 - a. be not less than 60mm high, raised approximately 0.7mm above the surface;
 - b. be located 1500mm from the finished floor; and
 - c. be contrasting in colour with the surface to which they are applied.

Note: The request to have stairwells that access the roof illustrated with a circle around the identifier is a Fire Department requirement and does not appear in the codes.

